

TSC T-4502E

Barcode Printer

Smart Identify Ltd.

594/9 Hathairat Rd., Bangchan, Klong Samwa, Bangkok 10510

Tel.02-136-9171-4 / 081-344 9591 | E-mail : info@smartiden.com

www.เครื่องพิมพ์พร้อมไป.คอม

Product Main Features :

Double motor design 203 dpi or 300 dpi carbon with capacity of 300 meters, 1 inch carbon with scroll bar internal paper roll (roll Type carbon belt) capacity, optional 5 inch diameter 8.4 inch diameter roll printing mechanism module design large memory capacity of 4 MB Flash, 8 MB SDRAM, equipped with a microSD card slot USB 2.0 standard communication interface built True Type Font Type human language TSPL - EZ & trade high order printer.

Application

T-4502E Thermal Label Printer Thermal Transfer Adhesive Printer Single Thermal Printer, USB Tag Labeling Machine

Product Parameters

Brand	: TSC
Model	: T-4502E
Dimensions	: 285x226x171 mm
Resolution	: 203 dpi 300 dpi
Printing speed	: 5 ips (127 mm/s)
Print width	: 108 mm (4.25")
Interface	: USB
Printing method	: Thermal transfer
Network printing	: No
Color	: Black
Ribbon length	: 300 meters



TSC T-4502E

Barcode Printer

Smart Identify Ltd.

594/9 Hathairat Rd., Bangchan, Klong Samwa, Bangkok 10510

Tel.02-136-9171-4 / 081-344 9591 | E-mail : info@smartiden.com

www.เครื่องพิมพ์พร้อมไปะ.com



T-4502E 203 dpi
T-4503E 300 dpi




Can print 108 mm

can choose two kinds



Interior display

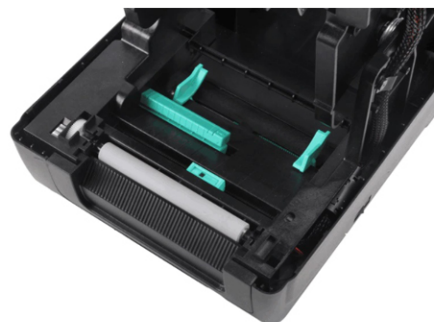

Moveable sensor

TSC T-4502E

Barcode Printer

Smart Identify Ltd.

594/9 Hathairat Rd., Bangchan, Klong Samwa, Bangkok 10510

Tel.02-136-9171-4 / 081-344 9591 | E-mail : info@smartiden.com

www.เครื่องพิมพ์พร้อมไป.คอม

Standard Features

Product Name	t-4502e/t-4503e	Operating temperature	Operating Environment:5 ~°C,
Print mode	Heat-Transfer / thermal		Humidity (non-coagulation)
Resolution	200 dpi / 300 dpi	Storage temperature	Storage environment:-40 ~°C,
Print speed	5 ips (127 mm/s)		Humidity (non-coagulation)
Print width	108 mm (4.25")	Environmental specifications	Compliant with RoHS,WEEE
Print length	300 meters	Weight (including battery)	2.45 kg (5.4 lb)
cpu	bit Efficient processor	Distributor Selection	• Label stripping sensor • Knife Cutter (full-cut and half-cut) • Washing standard Electrostatic brush module
Memory	• 4 MB Flash Memory • 8 MB SDRAM • MicroSD Card Memory expansion slots to expand memory to 4 GB	Dustproof and Waterproof	IP54 (need to include protective bag)
Transducer	• Paper spacing sensor (penetrating, Position adjustable) • Black line marker sensor (reflection, Position adjustable) • Ribbon Exhaust Sensor • Print head lift sensor	Safety Certification	FCC Class A ,CE Class A,CCC
Shell	ABS Plastics	Paper thickness	0.06 ~ 0.254 mm (2.36 ~ Ten secret ears)
Operator panel	Power switch, out of paper key,led led (3 colors: green, orange, red)	Paper Type	Continuous paper, pitch paper, Black Label paper, tag, folding paper (outer volume / inside volume type)
Size	285x226x171 mm	Paper width	1.0 ~ 4.6 inch
Instruction Set	Tspl-eztlm (compatible with EPL,zpl,zpl II)	Barcode	• One-dimensional barcode Code, code 128UCC, Interleaved 2 of 5, EAN-8, EAN-13, EAN-128, Upc-a, UPC-E, EAN and UPC 2 (5) Digits add-on, MSI, Plessey, POSTNET, China POST, GS1 DataBar, Code 11 • Two-D barcode PDF-417, Maxicode, Datamatrix, QR code, Aztec, GS1 DataBar Composite code • Eight bitmap fonts • A MONOTYPE®CG triumvirate Bold condensed vector font and True Type font font generator • Use software to download Windows fonts • With backlit Display, LCD display screen
Interface	• USB 2.0 • Serial port (RS-232) (customer selection) • Parallel port (Parallel) (customer selection) • Built-in Ethernet network server (customer selection) • Bluetooth (customer selection) • 802.11 b/g/n wireless network transfer (customer selection)	Internal font	
Accessories	• Windows volume label editing software, drivers, and operating manuals CD • Quick Installation Guide • USB transmission line • Power Cords • External voltage automatic switching power supply • Paper reel, paper coil fixed plate X 2 • Ribbon Reel X 2 • Carbon Tape Recycling paper tube	Factory selection	